

NEOREST®

MS993CUMFX

Neorest® 750H Dual Flush Toilet, 1.0GPF

FEATURES

- Tornado Flush™ siphon jet flushing system, ultra-high efficiency.
- Actilight™ UV light cleaning system built in lid
- CeFiONtect™ ceramic glaze - a highly smoothed surface for easier cleaning
- Dual Flush function (1.0GPF/3.8LPF and 0.8GPF/3.0LPF)
- Universal Height
- Washlet® with three wash modes (front, rear, soft)
- Oscillating and Pulsing comfort washing
- Auto lid open/close, auto flush
- Automatic air purifying system
- Adjustable heated seat
- Adjustable spray position
- Programmable energy saver system
- Back-up manual flush
- eWater+® - mists the bowl with electrolyzed water, reducing the need for harsh cleaning chemicals.
- Multifunctional remote control
- ADA compliant

COMPONENTS

- SN993MX#01 - Top Unit
- CT993CUMFX#01 - Elongated Bowl

Note: SN993MX Only compatible with CT993CUMFX

COLORS/FINISHES

- #01 Cotton

PRODUCT SPECIFICATION

The Neorest 750H with the Tornado Flush system toilet shall be 1.0GPF/3.8LPF and 0.8 GPF/3.0 LPF. Toilet shall have Actilight cleaning system, CeFiONtect ceramic glaze and be at Universal Height. Toilet shall be of skirted design, elongated front bowl with auto open and close seat. Toilet shall be **TOTO Model MS993CUMFX#01**.



eWater+

CeFiONtect

Actilight

Tornado Flush

CODES/STANDARDS

- Meets and exceeds ASME A112.4.2, ASME A112.19.2/CSA B45.1, ASME A112.18.1/CSA B125.1, UL 1431, CSA C22.2 # 68
- Certifications: IAPMO(cUPC), State of Massachusetts, City of Los Angeles and others
- Code Compliance: UPC, IPC, NSPC, and others
- ADA compliant



MS993CUMFX

Neorest® 750H Dual Flush Toilet, 1.0GPF

SPECIFICATIONS

Water Use:	1.0 GPF/3.8 LPF & 0.8 GPF/3.0 LPF
Flush System:	Tornado Flush Siphon Jet
Water Pressure:	Min 7 PSI (0.05MPa) Flowing Max 105 PSI (0.75 MPa) Static
Min Flow Rate:	2.64 gal/min (10 L/min)
Water Surface:	8-3/4" x 7-1/4"
Trap Diameter:	2-1/8" (54 mm)
Rough In:	12" rough-in Warning: If there is a base board in the restroom, the center of the floor drain should be a minimum of 12" from the base board.

Trap Seal:	2-1/16" (53 mm)
Warranty:	Three Year Limited (Residential) One Year Limited (Commercial)

Material:	Bowl: Vitreous china Seat and cover: Plastic
-----------	---

Shipping Weight:	Top Unit - SN993MX 17.6lbs Bowl Unit - CT993CUMFX
------------------	--


106lbs

Shipping Dimensions:	SN993MX - 20-5/8" x 34-13/16" x 8-13/16" CT993CUMFX - 18-13/16" x 33-1/4" x 24-7/8"
----------------------	--

Power Rating	120V AC, 60 Hz.1300W
Power Cord	Maximum length: 4 ft (1.2 m)
Water Feature	Adjustable Water Flow Rate
Rear Washing	from 9.1 to 14.5 oz/min.
Soft Washing	from 10.8 to 14.5 oz/min.
Front Washing	from 9.8 to 14.5 oz/min.
Wide Front Washing	from 11.8 to 14.5 oz/min.
Washing Spray Temperature	Minimum: 86° F/30° C Maximum: 104° F/40° C
Safety Feature	Temperature fuse and float switch
Drying Feature	Air Temperature: High: About 130°F/55°C Low: About 95°F/35°C
Capacity of Air	10.2 ft³/min
Safety Feature	Temperature fuse
Seat Warming Feature	Surface Temperature: Minimum: 82° F/28° C Maximum: 97° F/36° C
Seat Heater Capacity	60W
Safety Feature	Thermal fuse
Air Purifying Feature	Method: O ₂ Deodorizer Air Volume: 5.7 ft³/min
Ambient Temperature Range	32°F/0°C to 104°F/40°C
Product Size	17-5/18" x 31-7/16" x 20-3/4"
Weight	Net: 123.6 lbs.
Floor to Seat Height:	17 1/4" (438mm)

INSTALLATION NOTES

- For use with potable water only. Do not use with recycled water.

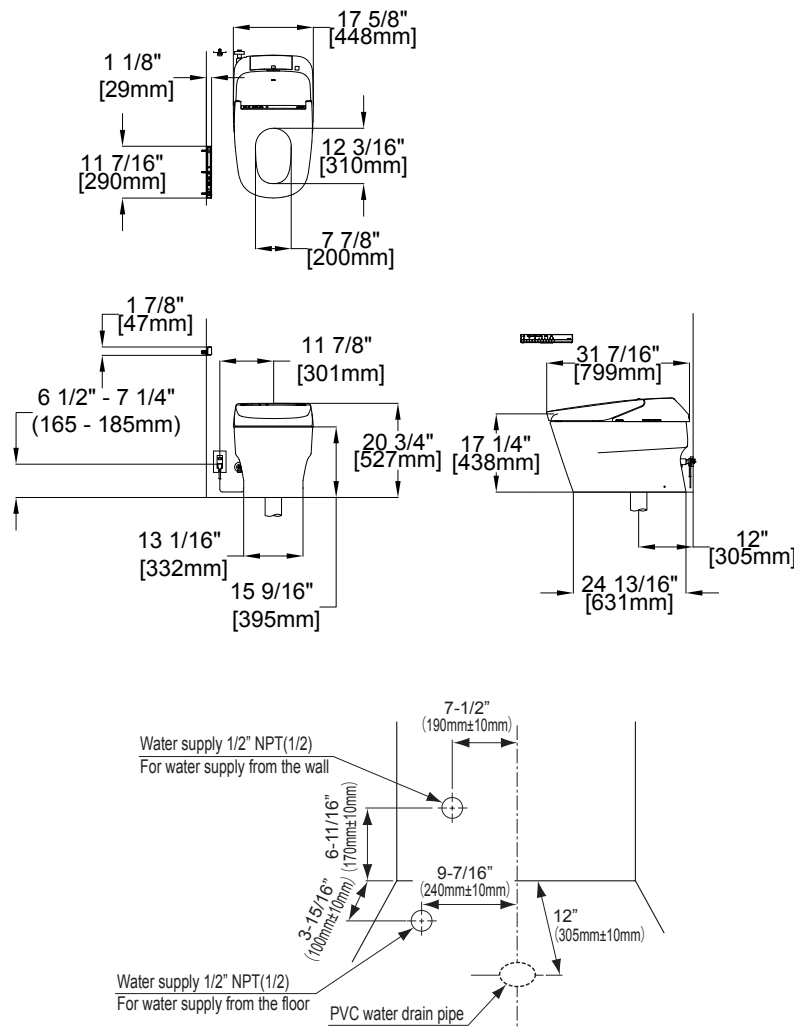

TOTO®

These dimensions and specifications are subject to change without notice